

# Rogue™ R2 Beam




Rogue™ R2 Beam is the light cannon of the Rogue™ series, boasting an intense 133,200 lux at 15 m with its Osram Sirius 230 W HRI lamp. Rogue™ R2 Beam is a powerful fixture delivering the punch, with 14 fixed colors plus white to choose from in its fully scrollable, variable speed color wheel, which also provides split colors perfectly. Rogue™ R2 Beam's 8-facet rotating prism provides you with an endless supply of creative and dynamic beam looks to elevate the design of your production. Rogue™ R2 Beam is tough, and features an industry-standard Neutrik® powerCON® power input connection, and 3-pin and 5-pin DMX connections for ease at load-in.

## FEATURES

- Powerful 1-degree beam, 133,200 lux @ 15m
- 17 gobos with continuous variable-speed wheel scroll
- 8-facet rotating prism for incredible gobo and beam effects
- Color wheel with 14 colors, split color ability, and continuous variable-speed scrolling
- Neutrik® powerCON® power input connection
- Intense 230 W Osram Sirius HRI lamp
- 3- and 5-pin DMX input/output connections
- Simple and complex DMX channel profiles for programming versatility

## GOBOS & COLOR WHEEL

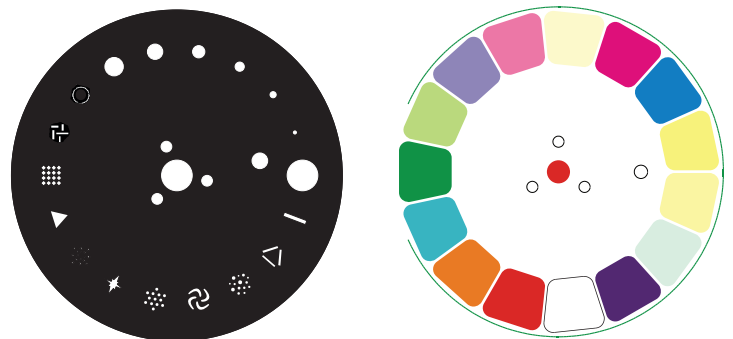

CONTINUED...

# Rogue™ R2 Beam (continued)

## SPECIFICATIONS

- DMX Channels: 15 or 18
- Data Connectors: 3- and 5-pin XLR
- Light Source: Osram Sirius lamp, 230 W, 8000 K, 2,500 hours life expectancy
- Pan and Tilt: 540°/270°
- Pan and Tilt Ranges: 180°, 360°, 540° pan/90°, 180°, 270° tilt
- Automatic Pan/Tilt Correction: Yes
- Colors: 14 + white, split colors, continuous scroll at variable speeds
- Gobos: 17 + open (17 metal), continuous scroll at variable speeds
- Prism: 8 Facets, motorized, rotating
- Dimmer: Motorized
- Focus: Motorized
- Frost: Motorized
- Shutter/Strobe: Motorized
- Strobe Rate: 0 to 20 Hz
- Beam Angle: 1°
- Field Angle: 2°
- Illuminance (total): 133,200 lux @ 15 m
- Color Temperature (at full): 7500 K
- IP Rating: IP20, dry location
- Cable Length: 5 ft (1.5 m)
- Power Connection: Edison plug to Neutrik® powerCON®
- Power Input: Neutrik® powerCON®
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 413 W, 3.4 A @ 120 V, 60 Hz
- Power and Current: 393 W, 1.9 A @ 208 V, 60 Hz
- Power and Current: 385 W, 1.7 A @ 230 V, 50 Hz
- Weight (single unit): 45 lb (20.6 kg)
- Weight (road case): 196.6 lb (89.2 kg)
- Dimensions (single unit): 16.1 x 12.9 x 18.7 in (409 x 327 x 474 mm)
- Dimensions (road case): 42.1 x 19.3 x 33.5 in (1,070 x 490 x 850 mm)
- Approvals: CE, MET

