

# Rogue™ R2 Spot



Rogue™ R2 Spot is a class leader in LED automated spots, combining incredible value with professional quality engineering. Rogue™ R2 Spot features a powerful 240-W LED light engine to drive a bright, crisp spot that is designed to impress. Rogue™ R2 Spot features seamless fading between the two gobo wheels for excellence in your designs. Not to be outdone, Rogue™ R2 Spot features two continuously and variably scrolling color wheels, allowing you also to have a large series of split colors at your fingertips. Rogue™ R2 Spot's 16.5-degree beam angle comes with motorized iris, frost, and a 3-facet prism for creative beam shaping. Rogue™ R2 Spot also features industry-standard Neutrik® powerCON® power input/output connections for power linking, and 3-pin and 5-pin DMX data connections for ease of use at load in.


## FEATURES

- Intense 240-W LED light engine for punchy, bold beams
- Unique game-changing Gobo Morphing between gobo wheels
- Two color wheels with 7 colors, split color ability, and continuous variable speed scrolling
- Two gobo wheels, rotating, interchangeable, indexing, continuously and variably scrollable
- Iris, 3-facet prism, and frost for beam control
- Beautiful 16-bit LED dimming for ultimate fade control
- Neutrik® powerCON® power input/output connections for power linking
- 3- and 5-pin DMX input/output connections

## COLORS



## GOBOS

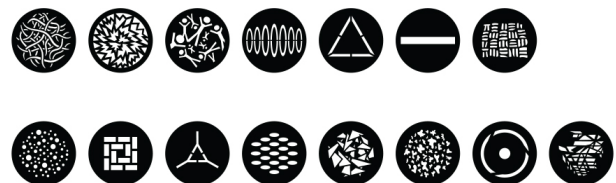

CONTINUED...

# Rogue™ R2 Spot (continued)

## SPECIFICATIONS

- DMX Channels: 18 or 21
- Data Connectors: 3- and 5-pin XLR
- Light Source: 1 LED (CW) 240 W, (7 A), 8250 K, 50,000 hours life expectancy
- Pan and Tilt: 540°/270°
- Pan and Tilt Ranges: 180°, 360°, 540° pan/90°, 180°, 270° tilt
- Automatic Pan/Tilt Correction: Yes
- Colors (1): 7 + white, split colors, continuous scroll at variable speeds
- Colors (2): 7 + white, split colors, continuous scroll at variable speeds
- Gobos (1): 7 + open (7 metal), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
- Gobos (2): 8 + open (8 metal), continuous scroll at variable speeds
- Gobo Size: Gobo Wheel 1 (rotating): 28.8 mm (outside), 23.8 mm (image), 0.5 mm (max. thickness)
- Prism: 3 Facets, motorized, rotating
- Dimmer: Electronic
- Focus: Motorized
- Iris: Motorized
- Frost: Motorized
- Shutter/Strobe: Electronic
- Strobe Rate: 0 to 22 Hz
- Beam Angle: 16.5°
- Illuminance (total): 5,500 lux @ 5 m
- Color Temperature (at full): 8500 K
- IP Rating: IP20, dry location
- Cable Length: 5 ft (1.5 m)
- Power Connection: Edison plug to Neutrik® powerCON®
- Power Input: Neutrik® powerCON®
- Power Output: Neutrik® powerCON®
- Power Linking: 5 units @ 120 V; 8 units @ 208 V; 9 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 310 W, 2.6 A @ 120 V, 60 Hz
- Power and Current: 304 W, 1.5 A @ 208 V, 60 Hz
- Power and Current: 301 W, 1.4 A @ 230 V, 50 Hz
- Weight (single unit): 46.6 lb (21.2 kg)
- Weight (road case): 196 lb (89 kg)
- Dimensions (single unit): 16.1 x 13.5 x 19.25 in (409 x 343 x 489 mm)
- Dimensions (road case): 42.1 x 19.3 x 33.5 in (1,070 x 490 x 850 mm)
- Approvals: CE, MET



**CHAUVET**  
PROFESSIONAL