



XS 1200 Beam

PR-2933M

This hi-power unit produces very intense and bright 5° beam that is enhanced by its high quality and super efficient optical system. Meanwhile, two more beam options by Extended Frost 1: 9.5° and Extended Frost 2: 11.5° make it increase much more value.

Key Features:

- 1200W discharge lamp
- CYM colour mixing +6 dichroic colour filters
- 6 indexable rotating gobos +7 fixed gobos (all easily interchangeable)
- Focus 5° in 16 Bit precision, Extended Frost 1: 9.5° and Extended Frost 2: 11.5°
- DMX controlled, linearly adjustable focus (8- or 16-bit)
- Linearly adjustable dimmer
- 1x3-facet prism +1 x linear frost + 2 extended frosts
- Double strobe/shutter blades, 0.3~25 F.P.S
- Auto Pan/Tilt position correction, speed adjustable, with lock mechanism
- Ultra-quiet and smooth operation with advanced control technology
- Energy saving function of the ballast
- Built-in analyzer for easy fault finding, error messages
- Fixture and lamp usage time display
- Modular construction for easy maintenance

Standard Accessories:

G clamps, 2 pcs; 5-pin XLR connectors, 1 set

Safety cord, 2 pcs; Spare gobos, 4 pcs

Optional Accessories: Ω clamps, 2 pcs

Technical Data:

Power Supply: 220V/230V AC, 50/60Hz Option: 200V/240V AC, 50/60Hz

Power Consumption: 1300W@220V

1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
+86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com

Light Source:

PHILIPS MSR Gold 1200 SA/2 DE
(7,500K, 750hrs, SFC10-4 Socket, double ended)
Or OSRAM SharXS HTI 1200 W/D7/60
(6,000K, 750hrs, SFC10-4 Socket, double ended)

Optics System:

Focus 5° in 16 bit precision
Extended Frost 1: 9.5° and Extended Frost 2: 11.5°

Colour System:

Smooth CYM colour mixing system + macro
1 colour wheel with 6 dichroic colour filters + white

Effect:**Gobos:****1 Rotating gobo wheel:**

6 interchangeable gobos + white, indexable and bi-directionally rotatable at variable speeds

1 Fixed gobo wheel:

7 interchangeable gobos + white, bi-directional wheel scrolling at variable speeds

Prism/Frost:

1x 3-facet prism, indexable, bi-directionally rotatable at variable speeds; 1x linear frost; 1x Extended Frost 1; 1x Extended Frost 2

Dimmer: 0~100% linearly adjustable (8- or 16- bit)

Strobe/Shutter: double strobe/shutter blades, 0.3~25 F.P.S

Control and Programming:

Control: DMX512, 3-pin and 5-pin interfaces, RDM, self-test mode

Channels: Short Mode:16, Standard Mode:20, Extended Mode:25

Head Movement:

Pan 540°, Tilt 270°

1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
+86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com

Auto Pan/Tilt position correction, speed adjustable

Physical Features:

Housing: Composite plastic (IP20)


Weight: 53kg

Packed Dimensions:


Dimensions:803x593x753(mm) /685x595x778(mm)

Packed Quantity: 1PC /Carton or 1PC/ Flight Case

Sizes:

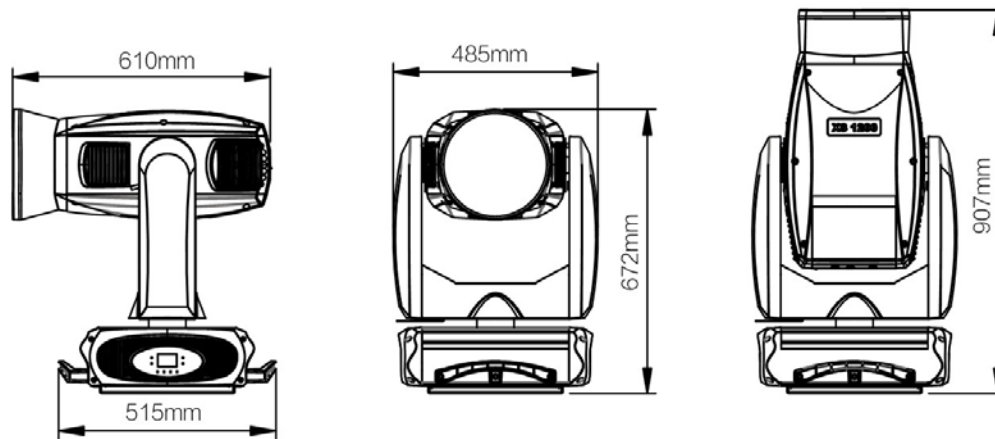

Light Output:

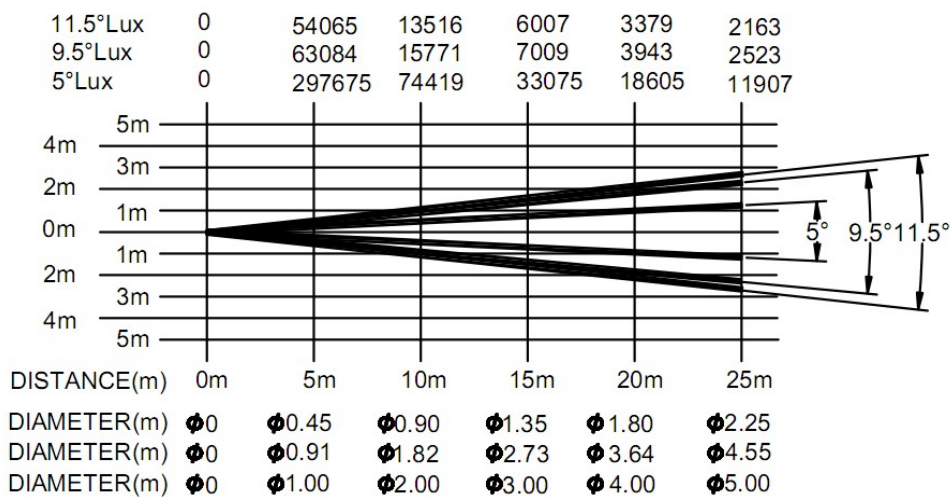

1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
 +86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com